

Gold Series Mini - GS4M

for small airflow applications

For 1,000 to 2,000 cfm dust and fume applications



Standard Features & Benefits —

- Fully assembled and prewired unit – fan, controls, motor starter, filters and cleaning system
 - 3 HP – 1,000 CFM at 9" w.c. or 2,000 CFM at 5" w.c.
 - HemiPleat® Fire Retardant cartridges with 788 total sq. ft of media
 - Automatic, reverse pulse cleaning system for long cartridge life, prewired to on demand pressure control panel
 - Built-In spark trap inlet to protect cartridges
 - Easy to remove aluminum dust drawers
 - Tool-less cam-lock cartridge removal
 - Built-In safety monitoring filter
 - 24 VDC contact for remote start from other equipment like a laser table or robot weld cell
- NEMA 4 rating on electrical enclosures
 - Cleaning system requirements 15 scfm of clean, dry compressed air at 90 psi
 - Rugged 10 ga. Construction
 - Housing rated for ± 1 psi
 - Weight: 1,400 lbs
 - Media area: 788 sq. ft.
 - Efficiency: 99.999% on 0.5 micron
 - Silencer designed for 70 dBA maximum


FARR
Air Pollution Control

	Product Sheet
GS Mini - GS4M	
SAFE AIR FOR A SAFE WORK ENVIRONMENT	

Specifications

Silencer reduces fan noise to under 70dBA.

NEMA 4 rating on electrical enclosures, and is available in 208 and 230/460 VAC, 60hz, 3 phase.

Reverse pulsing system is mounted on the inside of clean air plenum to reduce footprint and noise.

High entry cross-flow inlet with 10" diameter collar and spark trap.

HemiPleat® HE Tenkay cartridges are easy to remove with tool-less cam-lock system.

ASHRAE or HEPA after-filter for recirculation of interior air.

3 hp fan runs at 1800 rpm for better efficiency.


Aluminum drawers empty easy

Features easy opening cam-lock door for maintenance friendly filter access. The entire unit is constructed from 10 ga. steel and is powder coated inside and out for corrosion resistance.



Specifications

Fan Curve for 3 hp, 1,800 rpm fan - Other options available.

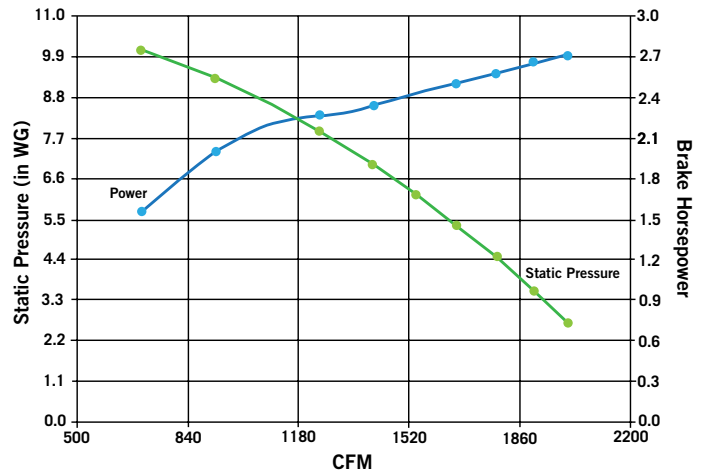


HemiPleat® Gold Cone™ Filter Cartridge

Gold Cone™ Pour-In-Place Urethane Gasket

Factory Bonded Steel Top and Bottom Headers

Exclusive Gold Cone™ Technology



Separator Bead Ensures Uniform Pleat Spacing of High Efficiency Media

Call us today **800-479-6801** www.farrapc.com



FARR

Air Pollution Control



Farr APC is a proud member of the Camfil Group.
Visit www.camfilfarrapc.com for offices out of North America.

870-933-8048 • Jonesboro, AR • email: filterman@farrapc.com